

## 2.4G TRANSMITTER OPTIONAL:







**RF-PIR Detector** 

Magnit-RF Detector


**RF Remote** 

WIRELESS

## **3-wire RF Reveiver**



Dimension(mm):

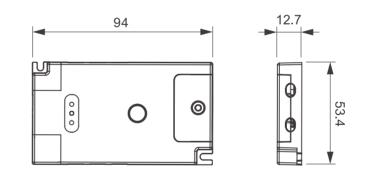

Model	Input Voltage	Power	Rated current	Distance	Function
HJK200-24VFR	12/24V DC	Single output@120W Three outputs@Max.200W	Single output @Max.5A Three outputs@Max.8.3A	≤15m	Independent switch for three groups of lights

\* A receiver can match up to 4 different transmitters

## 64 CONTROL SERIES

• Control mode (related to matching emitter) : Can be integrated IR/PIR,remote control switch, etc

## Applicable scenarios:

- 1) Applicable to multiple / set control scenarios,
- 2) Achieve a emitter control of multiple street lights



Remote control distance ≤15m